



Item # _____

Models 450A/550A Vacuum Package Machines

- Model 450A Single chamber, two 19" seal bars
- Model 550A Single chamber, two 25" seal bars



Model 550A



Safety and Convenience Features

Berkel Models 450A and 550A are reliable floor model vacuum package machines designed to meet most high-volume foodservice portion control, product storage and food retail needs. The units offer a spacious stainless steel chamber, powerful, high quality pump and two seal bars that provide a high integrity double seal with electric cut-off. Both models offer an anaerobic gas flush to maintain product color in the vacuum package, extend shelf life and/or to provide a pillow-pack seal to protect the product. Units are simple to operate and maintain.

Standard Features

- 450A floor model with a stainless steel housing and single 20" (508 mm) x 27-1/2" (699 mm) x 9-1/2" (241 mm) chamber; 550A floor model with a stainless steel housing and single 28" (711 mm) x 28" (711 mm) x 8" (203 mm) chamber
- Model 450A includes two 19" (483 mm) seal bars; Model 550A includes two 25" (635 mm) seal bars; provide high integrity double sealing with electric cut-off
- Powerful, high quality, 63 m³/h (450A), or 100 m³/h, (550A) Busch pump and vacuum dial gauge
- 1-speed, 3 HP (450A), 5 HP (550A) motor, totally enclosed, permanently lubricated ball bearings, thermally protected
- Furnished in 220/60/3, 9.5 amp (450A),14.5 amp (550A), AC, ETL listed
- Vacuum intervals of 1 to 99 seconds
- Gas flush for the addition of an anaerobic gas mixture and/or pillow-pack seal
- Simple to operate electronic, touch pad controls with nine storable programs
- Attached 6-foot, flexible, 3-wire cord for grounded receptacle

Accessories

- Air Assist
- Soft Air
- 12" Chamber (550A)

Approved By: _____ Date _____

Berkel Company • 4406 Technology Drive • South Bend, IN 46628-9700
 574-232-8222 • 800-348-0251 • FAX 888-888-2838 • www.berkel.com



Vacuum Package Machines Models 450A/550A

Model No.	Chamber Size			Seal Bar	Seal Bar Length	Product Dimensions		
	Width	Depth	Height			Width A	Depth B	Height C
450A	20" (508 mm)	27-1/2" (699 mm)	9-1/2" (241 mm)	2	19" (483 mm)	30-1/2" (775 mm)	32" (813 mm)	44" (1118 mm)
550A	28" (711 mm)	28" (711 mm)	8" (203 mm)	2	25" (635 mm)	31" (787 mm)	36" (914 mm)	47" (1194 mm)

	Pump m ³ /h	Electrical	Weight	Box Dimensions		
				Width	Depth	Height
450A	63	220/60/3	Net 410 lbs. (185 kg) Ship 482 lbs. (217 kg)	40" (1016 mm)	35" (889 mm)	46" (1168 mm)
550A	100	220/60/3	Net 510 lbs. (231 kg) Ship 585 lbs. (263 kg)	41" (1041 mm)	39" (991 mm)	50" (1270 mm)

Specifications

Finish/Construction: Floor models with stainless steel housing and single chamber.

Pump: Powerful, high quality 63 m³/h (☐ 450A), or 100 m³/h, (☐ 550A) Busch pump and vacuum dial gauge.

Electrical: Furnished in 220/60/3, 9.5 amp (☐ 450A), or 14.5 amp (☐ 550A), AC, ETL listed.

Vacuum Chamber: ☐ Model 450A includes a single, stainless steel 20" (508 mm) x 27-1/2" (699 mm) x 9-1/2" (241 mm) chamber. ☐ Model 550A includes a single, stainless steel 28" (711 mm) x 28" (711 mm) x 8" (203 mm) chamber. Vacuum intervals of 1 to 99 seconds.


Seal Bar(s): ☐ Model 450A includes two 19" (483 mm) seal bars; ☐ Model 550 includes two, 25" (635 mm) seal bars; provide high integrity double sealing with electric cut-off.

Gas Flush: Provides for the addition of an anaerobic gas mixture and/or pillow-pack seal.

Controls: Simple to operate, electronic, touch pad controls.

Cord and Plug: Attached 6-foot, flexible, 3-wire cord for grounded receptacle.

Warranty: All parts, service and travel coverage for one year, excluding wear items.

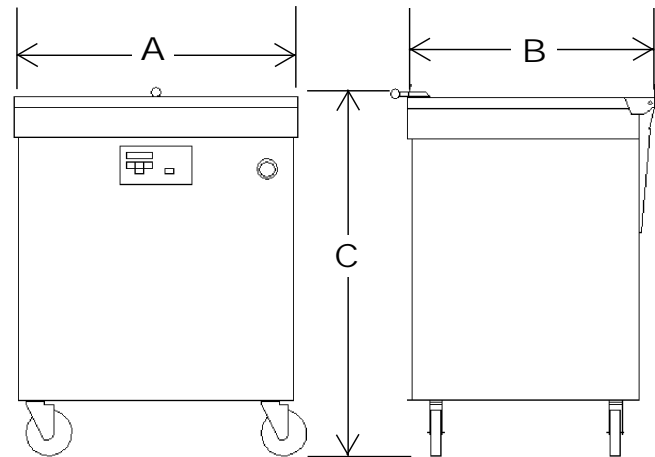

As we continually strive to improve our products, specifications are necessarily subject to change without notice.