

6702

ultra-compact convenience

The smallest point-of-sale scale on the market today for linking to electronic cash registers or POS systems.



shown with optional front mount display bracket.



shown with optional remote display post.



retail and food service weighing solutions

ultra-compact convenience

The 6702 is designed for use in coffee houses, convenience stores, cafeterias, ice cream parlors, tobacco shops, theaters, or other retailers where counter space is limited.

SPECIFICATIONS

Capacity and Resolution

Pounds	Kilograms
15 x 0.005	7 x 0.002
30 x 0.01	15 x 0.005

Dimensions

Weigh Platter: 6" x 10" (152 mm x 254 mm)
Remote Display Enclosure: 5.8" W x 3.0" H x 1.4" D max (147 mm x 76 mm x 35 mm)
Adjustable Height: 2.5" – 3.0" (63 mm – 76 mm)

Power

Input: Wall mount transformer 120 VAC (+10% -15%)/ 60 Hz (±3 Hz)
Standard 3 wire with ground input
Output: 15 VDC @ 0.3 Amps minimum

Operating Environment


41°F to 104°F (5°C to 40°C) (Class III device)
10% to 90% RH (non-condensing)

Agency Approvals

Legal for Trade, NTEP Class III,
USA COC #95-070A5
Canada: MOI approval #AM-5076 Rev. 2
Power Supply: UL Listed, CSA Certified



DIMENSIONS

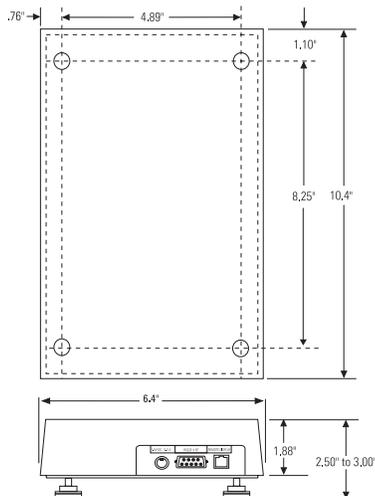

FEATURES & BENEFITS

- ◆ **Low Profile** Only 2.5" high.
- ◆ **Small Footprint** 6" x 10" platter.
- ◆ **Easy to Read** Six-digit LCD external display with large 0.5" characters, tactile keys, 7 ft. cable and Velcro™ for mounting.
- ◆ **Accurate and Reliable** Precision load cell and quality electronics ensure repeatable weight measurements and trouble-free operation.
- ◆ **Simple to Use** Reduces operator training time.
- ◆ **Easy to Install** Interfaces to most electronic cash registers and point-of-sale software programs.
- ◆ **Interfaces** RS-232, 4-bit parallel, 40-bit serial, and OPOS.
- ◆ **Auto Zero Tracking** Zero light indicator and manual control when out of range.
- ◆ **Quick Disconnects** Make all cable connections easily.
- ◆ **Construction** Stainless steel weighing area with full skirt around perimeter of base, except where connectors are located at rear of scale.

OPTIONS

- ◆ **Display Post** 12" high post for attachment to remote display.
- ◆ **Display Brackets** Attach remote display to scale base.
- ◆ **International Power Supply** 230 VAC, 50 Hz power supply. Cable terminated with a universal connector.
- ◆ **Cables** Interface cables available for PCs and specific ECRs.



retail and food service weighing solutions

Avery Berkel North America
3133 E 150 N
LaPorte, IN 46350

PH Toll-Free: 800-237-1886
PH: 219-325-9587

FAX Toll-Free: 800-237-2063
FAX: 219-325-9594

sales@AveryBerkelUSA.com
www.AveryBerkelUSA.com



As we continually strive to improve our products, specifications are necessarily subject to change without notice. Product complies with F.C.C..

